

DANCOVER[®]



Manual
Garage tent
2m Series

DANCOVER[®]

.com

Safety Advice

Attention

In some countries approval is needed to set up a marquee/tent larger than 75 m². It is your responsibility to comply with local rules and regulations and to ensure that the marquee/tent is assembled correctly.

In case of bad weather conditions, it is your responsibility to ensure the marquee/tent is safely secured and that the marquee/tent does not cause damage to others.

Do not use open fire, welding equipment or other sources which can ignite, inside or close to the tent.

The marquee/tent must be safely secured. We recommend you secure your marquee/tent with straps and pegs as soon as it is assembled.

Make sure to check if the marquee/tent is covered by your home contents insurance.

Marquees/tents must be evacuated under extreme weather conditions.

In the event of snow always remove snow from the roof of the marquee/tent regularly to prevent snow from building on the roof as heavy snow can cause the marquee/tent to collapse.

In the event of rain there is a risk of rain puddles building up on top of the roof of the marquee/tent. Heavy rain puddles can cause the roof to collapse. It is your responsibility to ensure rain puddles do not build up. As a precaution, make sure the roof of the marquee/tent is stretched out properly and adequately over the side frames of the marquee/tent and remove rain water regularly.

Do not unpack or repack your marquee/tent in freezing temperatures. In case of temperatures below zero always unpack and repack your marquee/tent indoors to avoid the risk of cracking parts.

The marquee/tent must be totally dry before you repack and store it to avoid mildew.

Warranty Information

Please visit dancovershop.com for information on warranty.

Please always check our website for the latest safety advice and manual.


Assembly manual

DEAR CUSTOMER


Assembly with more than one person suggested.

Please use gloves when assembling the metal frame portion of this unit.

The metal components of this product have been treated with a rust preventive coating that may feel oily to the touch. This coating is not dangerous, but may dirty your hands during assembly. We recommend that you wipe metal parts clean with a mixture of warm water and dish detergent prior to assembly. Should your hands become dirty, simply wash with soap and water.

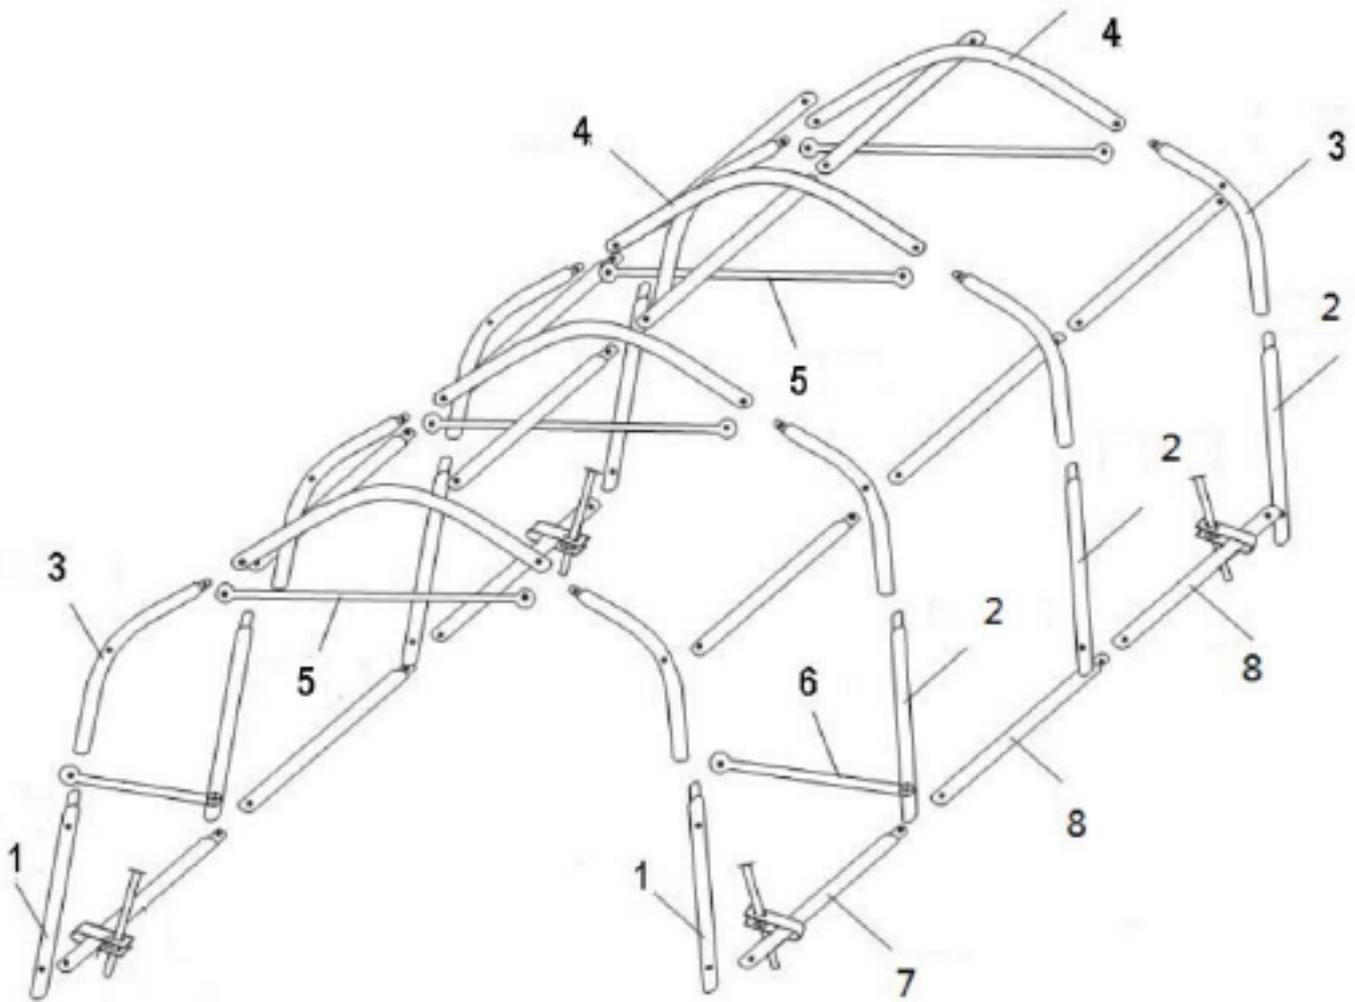


2m Part list

PART NO.	DESCRIPTION		QTY		
			2m	3m	4m
No.1	Back leg		2	2	2
No.2	Regular Leg		4	6	8
No.3	corner arch		6	8	10
No.4	Center arch		3	4	5
No.5	Cross bar		3	4	5
No.6	Diagonal		2	2	2
No.7	Connecting Pipe		5	5	5
No.8	Connecting Pipe		5	10	15
No.9	Anchoring Bracket		4	4	4
No.10	Anchoring rod		4	4	4
No.11	1-3/4" Bolt		8	10	12
No.12	2-1/2" Bolt		16	21	26
No.13	Wing Nut		24	31	38
No.14	Roof		1	1	1
No.15	Endwall		1	1	1

17-04-2015-SH

1. Assembly of middle arches

- a) Take one arch (no. 4); assemble with one main corner arch (No.3) on the left side.
- b) Take the other corner arch (no.3) on the right side.
- c) Take one completed arch; put screw 1-3/4" (No.11) through holes on the right side and attach bar (no.5) over screw and tighten wing nut(No.13)
- d) Repeat same procedures on the left side.

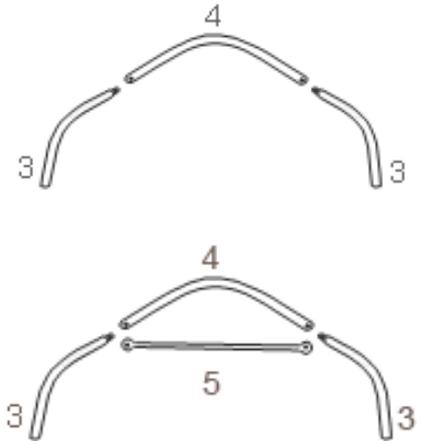

2. Repeat step 1 for the remaining middle arches.


3. Assembly of end arches (Wing nuts are always on inside of the shelter)

- a) Take one arch (No.4); assemble with one corner arch (No.3) on the left side.
- b) Take the other corner arch (No.3) on the right side.
- c) Repeat step 3 with the remaining arch.
- d) Place one of the last arches assembled at the front of the shelter, the other at the back.




4. Assembly of legs

- a) Insert (No.1) legs into an end arch one side at a time.
- b) Insert (No.2) legs to the second arch.
- c) Add second arch to assembly connecting (No.8) into (No.7) and diagonal bar (No.6) with screws 2 ½" (No.12) with wing nuts (No.13). See sketch at front page. Note: (06-374) should be placed at last section.
- d) Repeat step b) and c) until the whole shelter is completed.
- e) Make sure the base is open to 2m.
- f) Make sure the distances AD and BC have exactly the same length as per illustration, lengths depends on the model.



5. Cover installation (Ties are always on the inside)

- a) Place the roof in front of the shelter as illustrated.
- b) Unfold as illustrated then lift onto shelter as is.
- c) Place cover over the completed structure making sure that the TRIANGLE is at the front of the garage.
- d) Attach all straps inside the roof of the structure poles going completely around the garage.
- e) Tie firmly inside ties to bars.

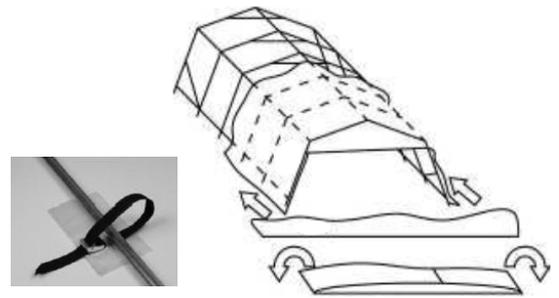

6. Anchoring garage.

- a) Place your garage in the final position you want then close the doors, front and back if supplied before anchoring, anchor with brackets (No.9) and nail (No.10) as per diagram on the first page. Drive anchor into ground.
- b) Fix flap to your house (if applicable).

DANCOVER[®]

.com

Contact information

Head office:

Dancover A/S
Nordre Strandvej 119 G
3150 Hellebæk
Denmark

For more information
please visit:
www.dancovershop.com

National contact

Denmark: 70 26 76 20
denmark@dancover.com

UK: 020 8099 7570
uk@dancover.com

Germany: 041 0266 7040
germany@dancover.com

France: 0975 181 800
france@dancover.com

Sweden: 040 233 262
sverige@dancover.com

Finland: 0 931 581 720
suomi@dancover.com

Poland: 22 300 8602
polska@dancover.com

Luxembourg: +49 041 0266 7040
luxembourg@dancover.com

Portugal: 308 800 899
portugal@dancover.com

Spain: 911 436 828
espana@dancover.com

Italy: 02 479 21 198
italia@dancover.com

Switzerland: 0840 000125
schweiz@dancover.com

Austria: 0662 626935
austria@dancover.com

Norway: 231 00 690
norge@dancover.com

Nederland: 0 858 880 524
nederland@dancover.com

Ireland: 0 151 33 003
ireland@dancover.com

Belgium: 0 28 08 08 09
belgique@dancover.com