DANCOVER®

Manual
Garage tent
5.4m serie

Safety Advice

Attention

In some countries approval is needed to set up a marquee/tent larger than 75 m2. It is your responsibility to comply with local rules and regulations and to ensure that the marquee/tent is assembled correctly.

In case of bad weather conditions, it is your responsibility to ensure the marquee/tent is safely secured and that the marquee/tent does not cause damage to others.

Do not use open fire, welding equipment or other sources which can ignite, inside or close to the tent.

The marquee/tent must be safely secured. We recommend you secure your marquee/tent with straps and pegs as soon as it is assembled.

Make sure to check if the marquee/tent is covered by your home contents insurance.

Marquees/tents must be evacuated under extreme weather conditions.

In the event of snow always remove snow from the roof of the marquee/tent regularly to prevent snow from building on the roof as heavy snow can cause the marquee/tent to collapse.

In the event of rain there is a risk of rain puddles building up on top of the roof of the marquee/tent. Heavy rain puddles can cause the roof to collapse. It is your responsibility to ensure rain puddles do not build up. As a precaution, make sure the roof of the marquee/tent is stretched out properly and adequately over the side frames of the marquee/tent and remove rain water regularly.

Do not unpack or repack your marquee/tent in freezing temperatures. In case of temperatures below zero always unpack and repack your marquee/tent indoors to avoid the risk of cracking parts.

The marguee/tent must be totally dry before you repack and store it to avoid mildew.

This structure is not tested for snow and wind loads. We always recommend that you remove snow from the roof.

Warranty Information

Please visit dancovershop.com for information on warranty.

Please always check our website for the latest safety advice and manual.

PARTLIST FOR 5.4m series


Part no.	Description		6m	7,5m	9m	10,5m
1	Leg		10	12	14	16
2	Female brace 60"	0 0	7	7	7	7
3	Corner arch		10	12	14	16
4	Center arch	0	5	6	7	8
5	Male door rail		5	6	7	8
6	Female door rail	© III	5	6	7	8
7	T-bar		5	6	7	8
8	Male brace 63"	0 0	21	28	35	42
9	Diagonal 80"		4	4	4	6
10	Rope		4	4	4	4
11	S-hook	S	16	16	16	16
12	Big door rail hook	Q	24	24	24	24
13	Elastic bungee		16	16	16	16
14	Floor bracket		8	8	8	8
15	Nail		16	16	16	16
16	Carriage bolt 1 3/4"		6	7	8	9
17	Carriage bolt 2 ½"		11	13	15	17
18	Carriage bolt 4"		27	33	38	43

PARTLIST FOR 5.4m series

Part no.	Description	6m	7,5m	9m	10,5m
19	Wing nut	55	66	77	88
20	Big plastic cap for legs	10	12	14	16
21	Small plastic cap for cross pipe	14	14	14	14
22	Roof	1	1	1	1
23	Door	2	2	2	2


DEAR CUSTOMER

Please use gloves when assembling the metal frame portion of this unit. The metal components of this product have been treated with a rust preventive coating that may feel oily to the touch. This coating is not dangerous, but may dirty your hands during assembly. We recommend that you wipe metal parts clean with a mixture of warm water and dish detergent prior to assembly. Should your hands become dirty, simply wash with soap and water.

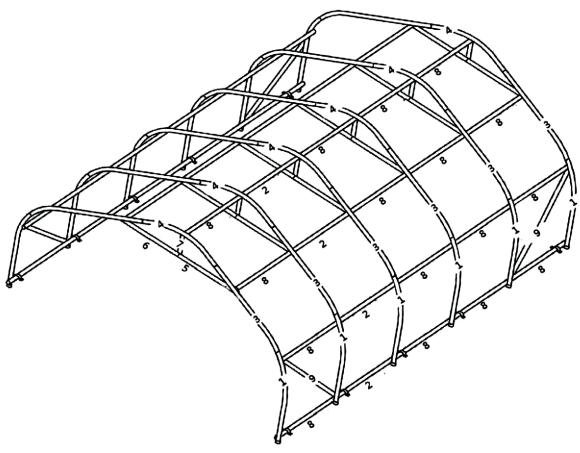


ASSEMBLY INSTRUCTIONS

- **1.** Take a Center Arch (no. 4) and on each end of it, assemble a Corner Arch (no. 3). Secure the Male and Female Door (no. 5) and (no. 6) to the Arch (no. 3).
- **2.** Slide the Rail Hooks over the Door Rails before tightening. Add the T-Bar (no. 7) to the Door Rails and the Center Arch.

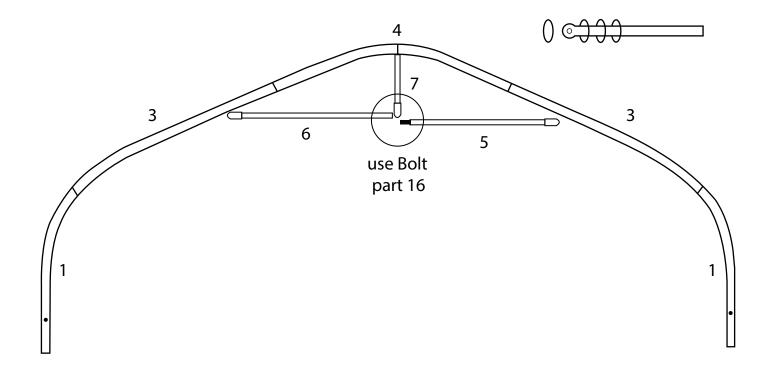


- **3.** On each end of (no. 3), install the Leg (no. 1). Repeat step 1 for all frames.
- **4.** At this point stand up the front or back frame and add 7 male connecting pipes (no. 8). Then stand up another frame and add 7 female connecting pipes (no. 2). For the remaining frames use the male connecting pipes (no. 8).
- **5.** Add the diagonals (no. 9) to the first and last legs (no. 1). Note: Make sure all screws are tight. Do not over-tighten.

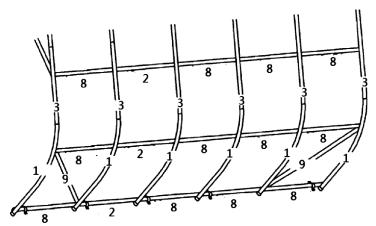

6. ROOF ASSEMBLY

Take the roof and place it over the structure. Make sure that the windows are on the two sides of the shelter, at front or at back as your choice.


Tie all the ropes around the pipes.

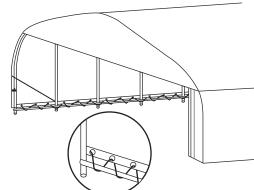

7. SHELTER REINFORCEMENT


Before you install the floor brackets, make sure the distance between the legs is 18 feet wide.

Place the floor brackets (14) at each end of the shelter. Then drive in nails (15) into ground, gravel or asphalt. Other material surfaces require other types of anchoring (cement blocks, sand bags, screw and bolt, etc). Permanent anchors are not provided with this unit.

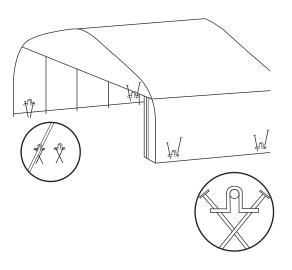

8. DOOR INSTALLATION

Install doors at each end. Connect door with roof by velcro as shown. Use elastics (13) to attach the door to the roof with hooks (11). Close the end of hook on the elastic so it won't fall on out. Use the rail hooks to attach door the door rails. When closing at the front, make sure all elastics are attached on the inside and outside of the shelters.

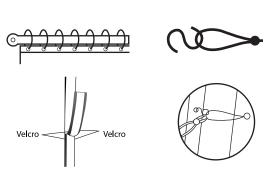

DANCOVER®

Contact information

Head office:

Dancover A/S Nordre Strandvej 119 G 3150 Hellebæk Denmark For more information please visit: www.dancovershop.com

National contact

Denmark: 70 26 76 20 denmark@dancover.com

UK: 020 8099 7570 uk@dancover.com

Germany: 041 0266 7040 germany@dancover.com

France: 0975 181 800 france@dancover.com

Sweden: 040 233 262 sverige@dancover.com

Finland: 0 931 581 720 suomi@dancover.com

Poland: 22 300 8602 polska@dancover.com

Luxembourg: +49 041 0266 7040

luxembourg@dancover.com

Portugal: 308 800 899 portugal@dancover.com

Spain: 911 436 828

espana@dancover.com

Italy: 02 479 21 198 italia@dancover.com

Switzerland: 0840 000125 schweiz@dancover.com

Austria: 0662 626935 austria@dancover.com

Norway: 231 00 690 norge@dancover.com

Nederland: 0 858 880 524 nederland@dancover.com

Ireland: 0 151 33 003 ireland@dancover.com

Belgium: 0 28 08 08 09 belgique@dancover.com